

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

SPECIFICATION

MX-156FL30VFH-N11

For Customer's Acceptance:

Approved By	Comment		
PREPARED	CHECKED	VERIFIED BY QA DEPT	VERIFIED BY R&D DEPT

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

1.0 General Descriptions

1.1 Introduction

The MX-156FL30VFH-N11 is a Color Active Matrix Liquid Crystal Display with a back light system. The matrix uses a-Si Thin Film Transistor as a switching device. This TFT LCD has a 15.6 inch diagonally measured active display area with FHD resolution (1,920 horizontal by 1,080 vertical pixels array).

1.2 Features

- Supported FHD Resolution
- LVDS Interface
- Wide View Angle
- Compatible with RoHS Standard

1.3 Product Summary

Items	Specifications	Unit
Screen Diagonal	15.6	inch
Active Area (H x V)	344.16 x 193.59	mm
Number of Pixels (H x V)	1,920 x 1,080	-
Pixel Pitch (H x V)	0.17925 x 0.17925	mm
Pixel Arrangement	R.G.B. Vertical Stripe	-
Display Mode	Normally Black	-
White Luminance	1,000 (Typ.)	cd /m ²
Contrast Ratio	1,000 (Typ.)	-
Response Time	35 (Max.)	ms
Input Voltage	3.3 (Typ.)	V
Power Consumption	27.8 (Max.)	W
Weight	960 (Max.)	g
Outline Dimension (H x V x D)	363.80 (Typ.) x 215.90 (Typ.) x 11.9 (Max.)	mm
Electrical Interface (Logic)	LVDS	-
Support Color	16.7 M	-
NTSC	72 (Typ.)	%
Viewing Direction	All	-
Surface Treatment	AG+3H	-

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

1.4 Functional Block Diagram

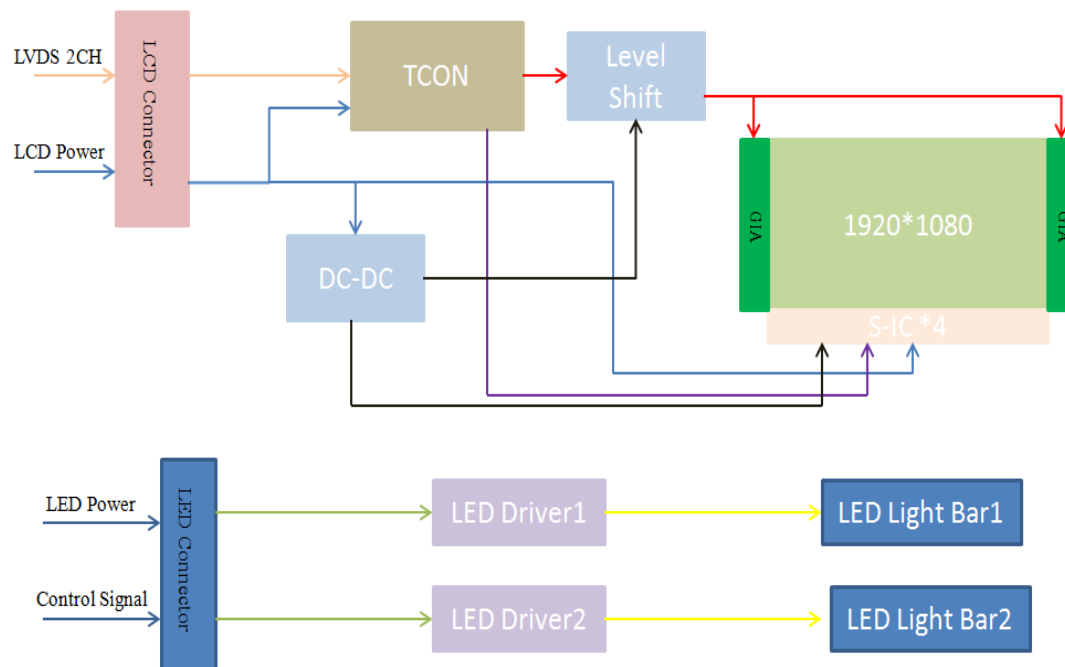


Figure 1 Block Diagram

1.5 Pixel Mapping

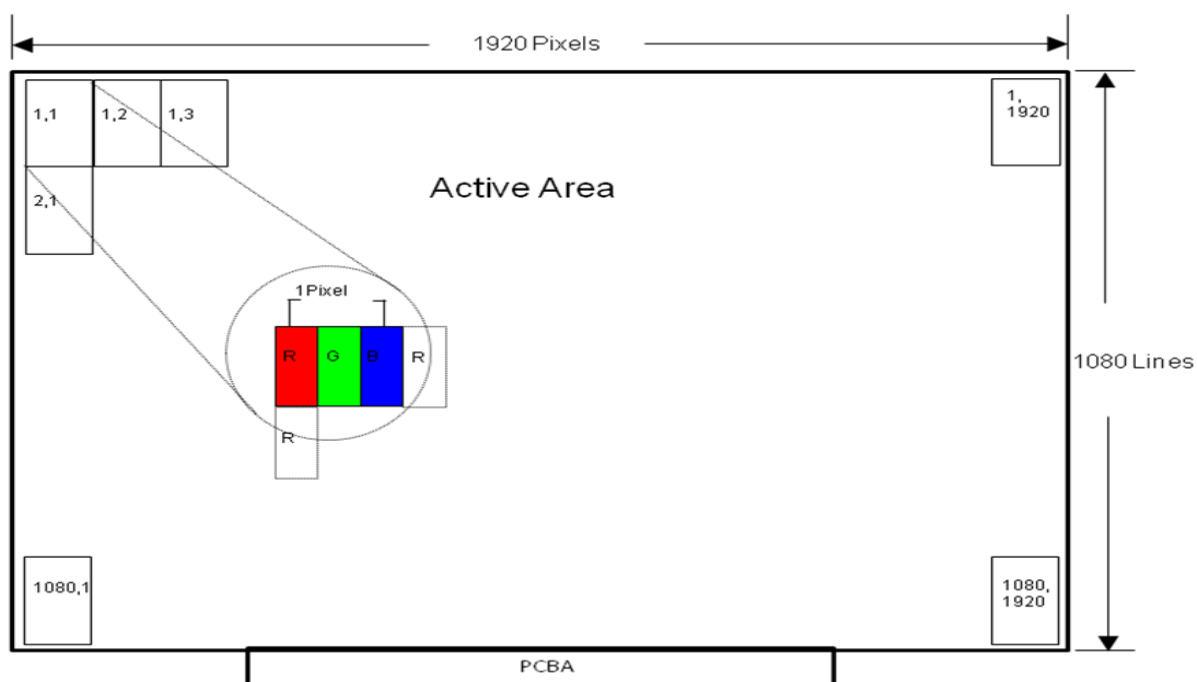


Figure 2 Pixel Mapping

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

2.0 Absolute Maximum Ratings

Table 1 Electrical & Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Logic Supply Voltage	V_{DD}	-0.3	4.0	V	(1),(2), (3),(4)
Operating Temperature	T_{gs}	-30	85	°C	
Storage Temperature	T_a	-30	85	°C	

Note (1) All the parameters specified in the table are absolute maximum rating values that may cause faulty operation or unrecoverable damage, if exceeded. It is recommended to follow the typical value.

Note (2) All the contents of electro-optical specifications and display fineness are guaranteed under Normal Conditions. All the display fineness should be inspected under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (3) Unpredictable results may occur when it was used in extreme conditions. T_a = Ambient Temperature, T_{gs} = Panel Surface Temperature. All the display fineness should be inspected under normal conditions.

Note (4) Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be lower than 38.3 °C and no condensation of water. Besides, protect the module from static electricity.

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

3.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes.

Table 2 Optical Characteristics

Item	Conditions		Min.	Typ.	Max.	Unit	Note
Viewing Angle (CR $\geq$ 10)	Horizontal	θ_{x+}	80	85	-	degree	(1),(2),(3),(4),(8)
		θ_{x-}	80	85	-		
	Vertical	θ_{y+}	80	85	-		
		θ_{y-}	80	85	-		
Contrast Ratio	Center		700	1,000	-	-	(1),(2),(4),(8) $\theta_x=\theta_y=0^\circ$
Response Time	Rising + Falling		-	25	35	ms	(1),(2),(5),(8) $\theta_x=\theta_y=0^\circ$
Color Chromaticity (CIE1931)	Red	x	Typ. -0.05	0.640	Typ. +0.05	-	(1),(2),(3),(8) $\theta_x=\theta_y=0^\circ$
	Red	y		0.326		-	
	Green	x		0.312		-	
	Green	y		0.647		-	
	Blue	x		0.152		-	
	Blue	y		0.062		-	
	White	x		0.313		-	
	White	y		0.329		-	
NTSC	-		67	72	-	%	(1),(2),(3),(8) $\theta_x=\theta_y=0^\circ$
White Luminance	Center		800	1,000	-	cd/m ²	(1),(2),(6),(8) $\theta_x=\theta_y=0^\circ$
Luminance Uniformity	9 Points		75	80	-	%	(1),(2),(7),(8) $\theta_x=\theta_y=0^\circ$

Note (1) Measurement Setup:

The LCD module should be stabilized at given temperature(25℃) for 30 minutes to avoid abrupt temperature changing during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 30 minutes in a windless room.

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

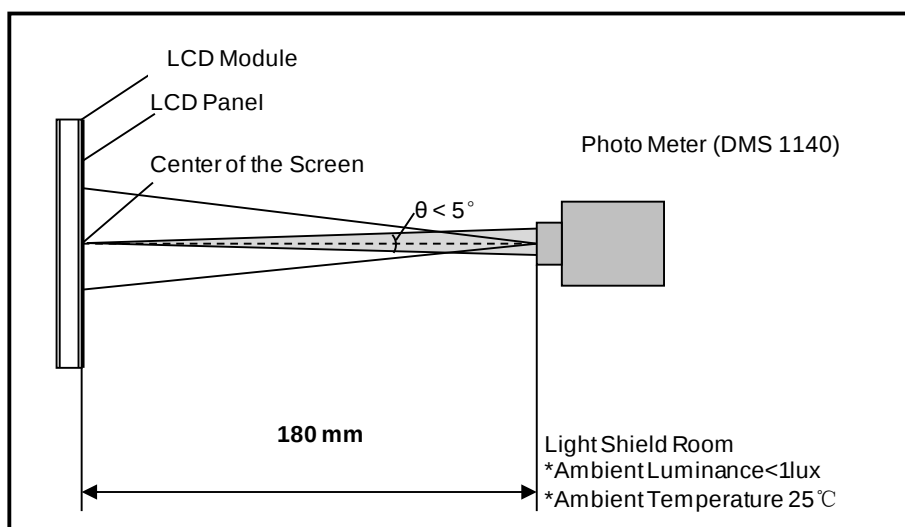


Figure 3 Measurement Setup

Note (2) The LED input parameter setting as:

PWM_LED: Duty 100 %

Note (3) Definition of Viewing Angle

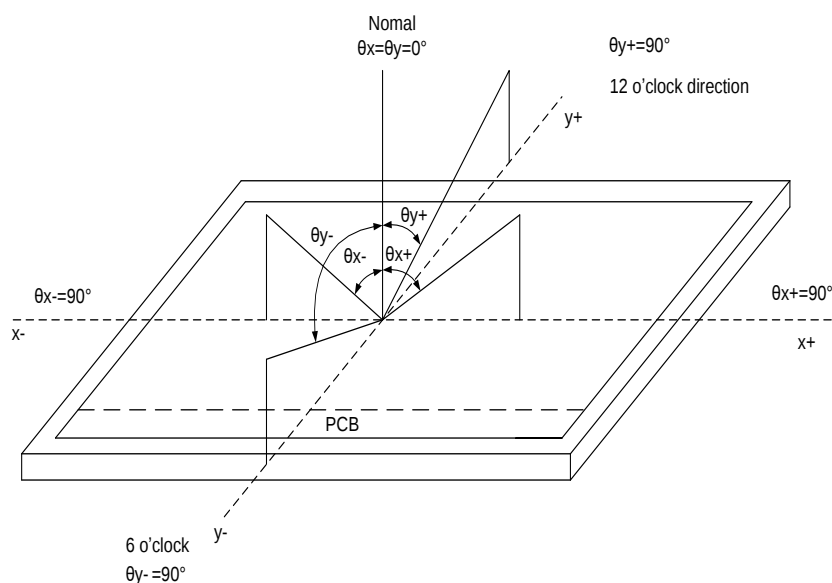


Figure 4 Definition of Viewing Angle

Note (4) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression:

Contrast Ratio (CR) = The luminance of White pattern/ The luminance of Black pattern

Note (5) Definition of Response Time (T_R , T_F)

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

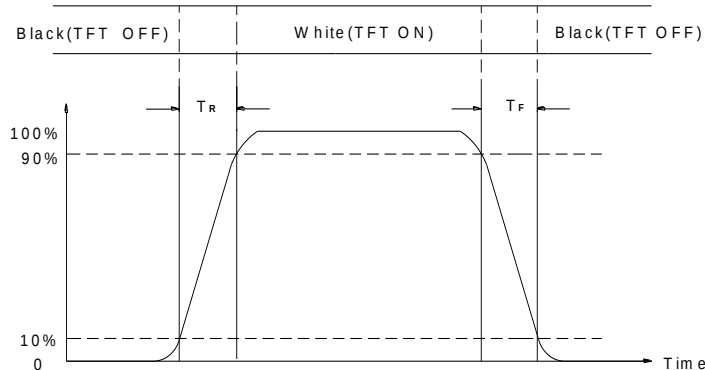


Figure 1 Definition of Response Time

Note (6) Definition of Luminance of White

Measure the luminance of White pattern (Ref.: Active Area)

Display Luminance= L_1 (center point)

H—Active Area Width, V—Active Area Height, L—Luminance

Note (7) Definition of Luminance Uniformity (Ref.: Active Area)

Measure the luminance of White pattern at 9 points.

Luminance Uniformity= $\text{Min.}(L_1, L_2, \dots, L_X) / \text{Max.}(L_1, L_2, \dots, L_X)$

H—Active Area Width, V—Active Area Height, L—Luminance

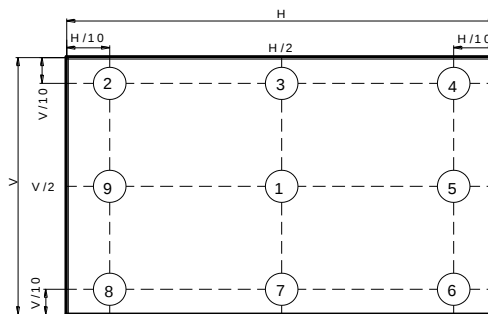


Figure 2 C-Light Spectrum

Note (8) All optical data are based on IVO given system & nominal parameter & testing machine in this document.

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

4.0 Electrical Characteristics

4.1 Interface Connector

Table 3 Signal Connector Type

Item	Description
Manufacturer / Type	STM MSBKT2407P30HB
Mating Receptacle / Type (Reference)	STM PFSKX10001N30(HOUSING) PF10001PS-00T(TERMINAL)

Table 4 Signal Connector Pin Assignment

Pin No.	Symbol	Description	Remarks
1	RxO0-	Negative LVDS differential data input (Odd data)	-
2	RxO0+	Positive LVDS differential data input (Odd data)	-
3	RxO1-	Negative LVDS differential data input (Odd data)	-
4	RxO1+	Positive LVDS differential data input (Odd data)	-
5	RxO2-	Negative LVDS differential data input (Odd data)	-
6	RxO2+	Positive LVDS differential data input (Odd data)	-
7	GND	Ground	-
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)	-
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)	-
10	RxO3-	Negative LVDS differential data input (Odd data)	-
11	RxO3+	Positive LVDS differential data input (Odd data)	-
12	RxE0-	Negative LVDS differential data input (Even data)	-
13	RxE0+	Positive LVDS differential data input (Even data)	-
14	GND	Ground	-
15	RxE1-	Negative LVDS differential data input (Even data)	-
16	RxE1+	Positive LVDS differential data input (Even data)	-
17	GND	Ground	-
18	RxE2-	Negative LVDS differential data input (Even data)	-

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

19	RxE2+	Positive LVDS differential data input (Even data)	-
20	RxECLK-	Negative LVDS differential clock input (Even data)	-
21	RxECLK+	Positive LVDS differential clock input (Even data)	-
22	RxE3-	Negative LVDS differential data input (Even data)	-
23	RxE3+	Positive LVDS differential data input (Even data)	-
24	GND	Ground	-
25	Bist	LCD Panel Self Test Enable(3.3V Typ) For IVO use,When it is not used, Connecting to GND or Floating is recommended	-
26	SDA	I2C-Compatible Serial-Data Input For IVO Use, Floating is recommended in the Costumer	-
27	SCL	I2C-Compatible Serial-Clock Input For IVO Use, Floating is recommended in the Costumer	-
28	VDD	Power Supply Input Voltage(3.3V)	-
29	VDD	Power Supply Input Voltage(3.3V)	-
30	VDD	Power Supply Input Voltage(3.3V)	-

Table 5 LED Connector Name / Designation

Item	Description
Manufacturer / Type	STM MSB24038P8A
Mating Receptacle / Type (Reference)	STM 24038PS-00 (TERMINAL) P24038P8 (HOUSING)

Table 6 LED Connector Pin Assignment

Pin No.	Symbol	Description	Remarks
1	VLED	LED power supply(12V Typ)	-
2	VLED	LED power supply(12V Typ)	-
3	VLED	LED power supply(12V Typ)	-
4	GND	GND	-
5	GND	GND	-

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

6	GND	GND	-
7	VLED_EN	Backlight On/Off (3.3V Typ)	-
8	VPWM_EN	System PWM signal input for dimming (3.3V Typ)	-

Note: The type of wire used for BL connector is AWG-28

4.2 Signal Electrical Characteristics

4.2.1 Signal Electrical Characteristics For LVDS Receiver

Table 1 The built-in LVDS receiver is compatible with (ANSI/TIA/TIA-644) standard

LVDS Receiver Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V_{th}	-	-	+100	mV	$V_{CM}=1.2V$
Differential Input Low Threshold	V_{tl}	-100	-	-	mV	$V_{CM}=1.2V$
Magnitude Differential Input Voltage	$ V_{ID} $	150	-	600	mV	-
Common Mode Voltage	V_{CM}	0.7	-	1.6	V	-

Note (1) Input signals shall be low or Hi- resistance state when VDD is off.

Note (2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

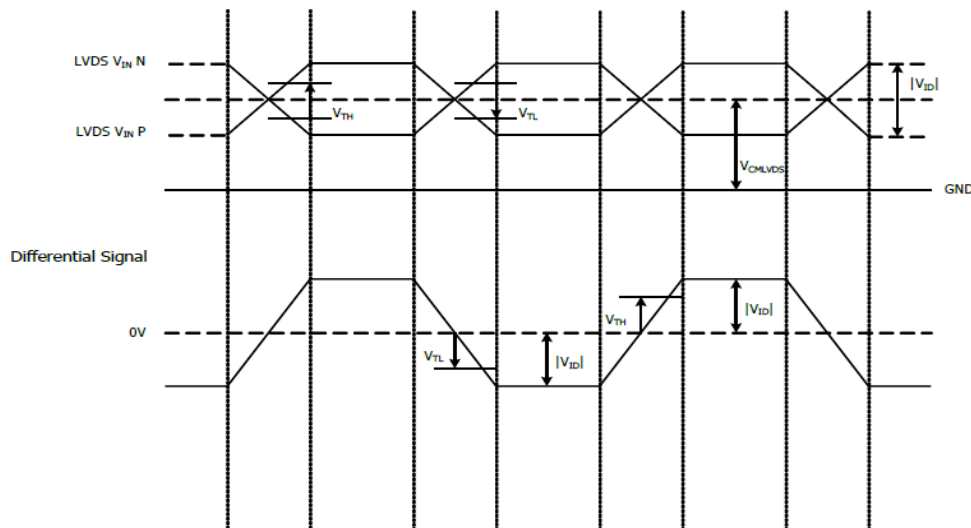


Figure 7 Voltage Definitions

Table 8 LVDS AC Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock Period	TLVCP	-	T	-	ns
Clock High Time	TLVCH	-	4T/7	-	ns
Clock Low Time	TLVCL	-	3T/7	-	ns

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

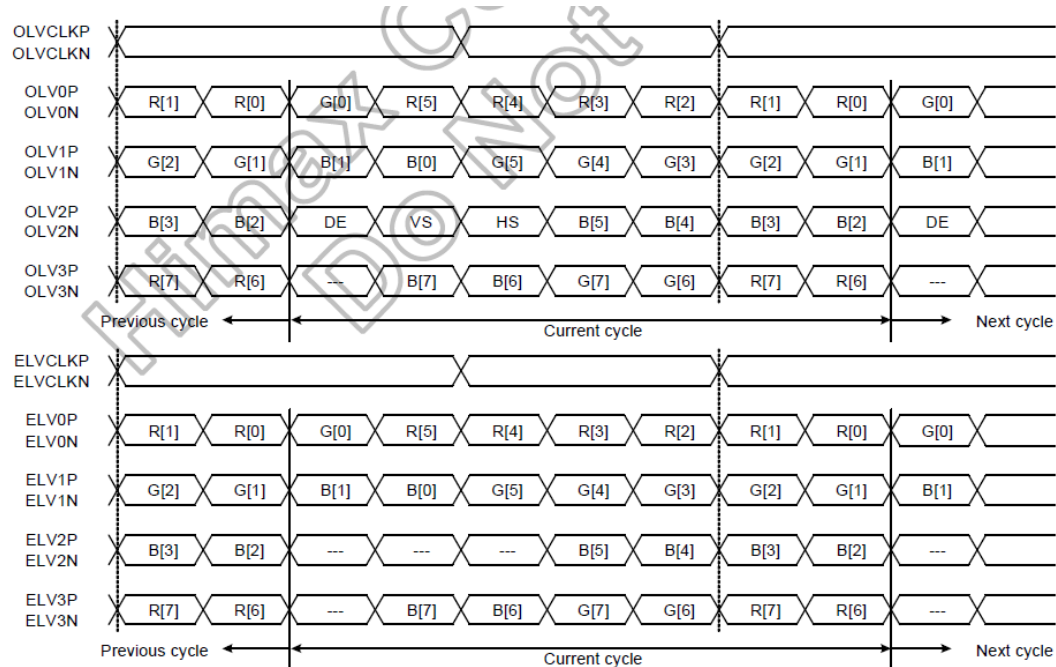


Figure 8 Data Mapping

4.2.2 LVDS Receiver Internal Circuit

Figure 11 shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link

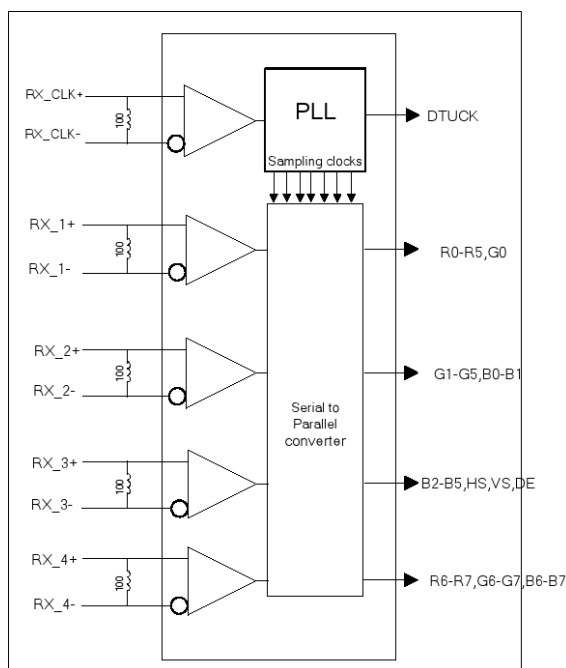


Figure 9 LVDS Receiver Internal Circuit

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

4.3 Interface Timings

Table 2 Interface Timings

Parameter	Symbol	Min.	Typ.	Max.	Unit
LVDS Clock Frequency	Fclk	69.5	70.5	73	MHz
V Total Time	VT	1104	1116	1080+A	Clocks
VActive Time	VA	1080			-
H Total Time	HT	1050	1052	960+B	Lines
H Active Time	HA	960			-
Frame Rate	FV	-	60	-	Hz

Note (1) SSC can only be driven to 2%

Note (2) The maximum clock frequency= $[(960+B)*(1080+A)*60]<73\text{MHz}$

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

4.4 Input Power Specifications

Input power specifications are as follows.

Table 3 Input Power Specifications

Parameter		Symbol	Min.	Typ.	Max.	Unit	Note
System Power Supply							
LCD Drive Voltage (Logic)		V _{DD}	3.0	3.3	3.6	V	(1),(2)
VDD Current	White Pattern	I _{DD}	-	-	0.454	A	(1),(3)
VDD Power Consumption	White Pattern	P _{DD}	-	-	1.5	W	
LCD Self Test (BIST)	High level voltage	V _{BIST}	0.7*VDD	-	VDD	V	(1)
	Low level voltage		0	-	0.3*VDD	V	
Rush Current		I _{Rush}	-	-	1.5	A	(1),(4)
Allowable Logic/LCD Drive Ripple Voltage		V _{VDD-RP}	-	-	200	mV	(1),(3)
LED Power Supply							
LED Input Voltage		V _{LED}	10.8	12	13.2	V	(1),(2),(8)
LED Power Consumption		P _{LED}	-	-	26.3	W	(1),(5),(8)
LED Forward Voltage		V _F	-	-	3.2	V	(1),(2)
LED Forward Current		I _F	-	70	-	mA	
PWM Signal Voltage	High level voltage	V _{PWM}	2.5	-	5.5	V	
	Low level voltage		0	-	0.5		
LED Enable Voltage	High level voltage	V _{LED_EN}	2.5	-	5.5	V	
	Low level voltage		0	-	0.5		
Input PWM Frequency		F _{PWM}	200	-	10,000	Hz	(1),(2),(5)
Duty Ratio		PWM	10	-	100	%	(1),(6)
LED Life Time		LT	50,000	-	-	Hours	(1),(7)

Note (1) All of the specifications are guaranteed under normal conditions. Normal conditions are defined as follow: Temperature: 25°C, Humidity: 55± 10%RH.

Note (2) All of the absolute maximum ratings specified in the table, if exceeded, may cause faulty operation or unrecoverable damage. It is recommended to follow the typical value.

Note (3) The specified V_{DD} current and power consumption are measured under the $V_{DD} = 3.3\text{ V}$, $F_V = 60\text{ Hz}$ condition and White Pattern.

Note (4) The figures below is the measuring condition of V_{DD} . Rush current can be measured when T_{RUSH} is 0.5 ms.

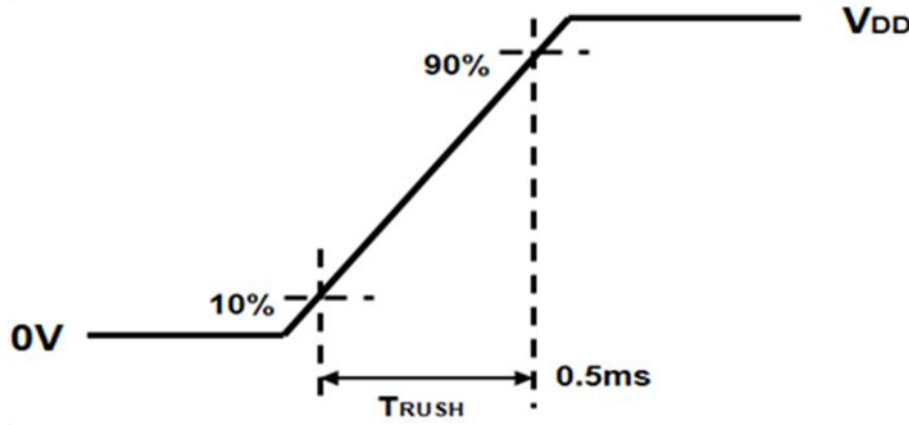


Figure 3 V_{DD} Rising Time

Note (5) The power consumption of LED Driver are under the $V_{LED} = 12.0V$, Dimming of Max luminance.


Note (6) Although acceptable range as defined, the dimming ratio is not effective at all conditions. The PWM frequency should be fixed and stable for more consistent luminance control at any specific level desired.

Note (7) The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.

Note (8) The life time is determined as the sum of the lighting time till the luminance of LCD at the typical LED current reducing to 50% of the minimum value under normal operating condition.

4.5 Power ON/OFF Sequence

Interface signals are also shown in the chart. Signals from any system shall be Hi- resistance state or low level when V_{DD} voltage is off.

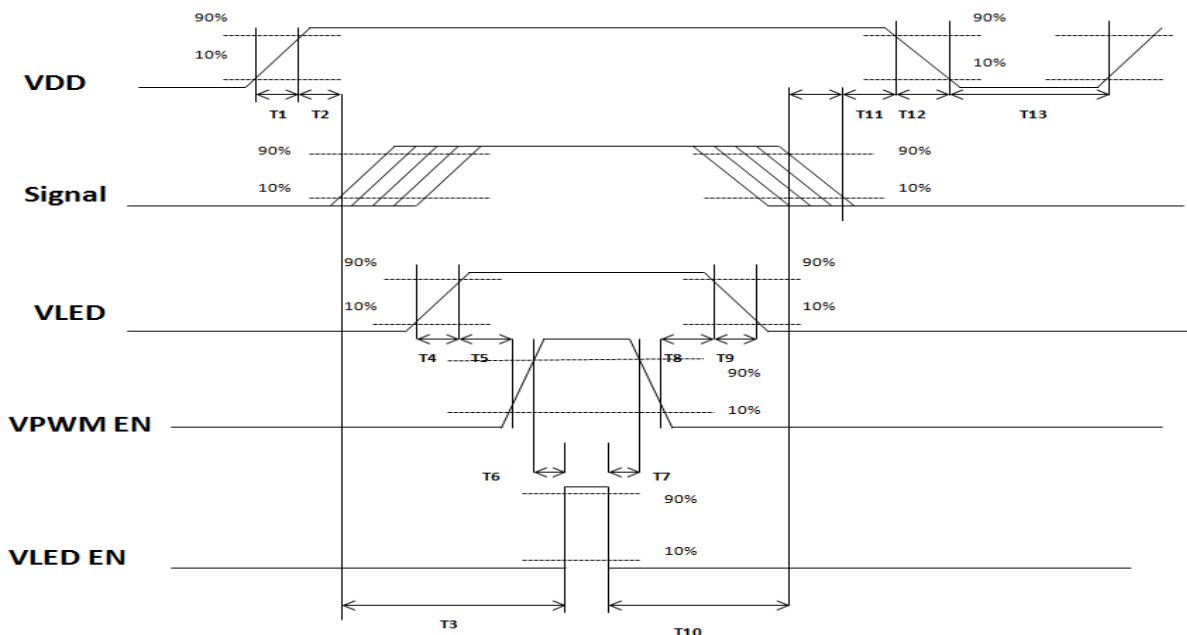

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

Figure 11 Power Sequence

Table 11 Power Sequencing Requirements

Parameter	Min.	Typ.	Max.	Unit
T1	0.5	-	10	ms
T2	30	40	50	ms
T3	200	-	-	ms
T4	0.5	-	10	ms
T5	10	-	-	ms
T6	10	-	-	ms
T7	0	-	-	ms
T8	10	-	-	ms
T9	-	-	10	ms
T10	110	-	-	ms
T11	0	16	50	ms
T12	-	-	10	ms
T13	1,000	-	-	ms

5.0 Mechanical Characteristics

3.1 Outline Drawing

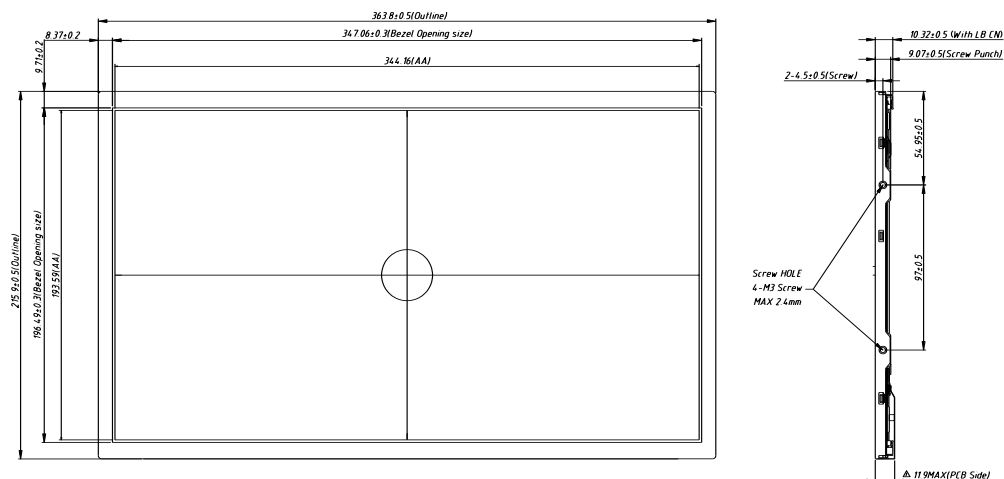


Figure 12 Reference Outline Drawing (Front Side)

Note: Torque of M3 user hole should be with 4Kg-cm and re-screw 10 times

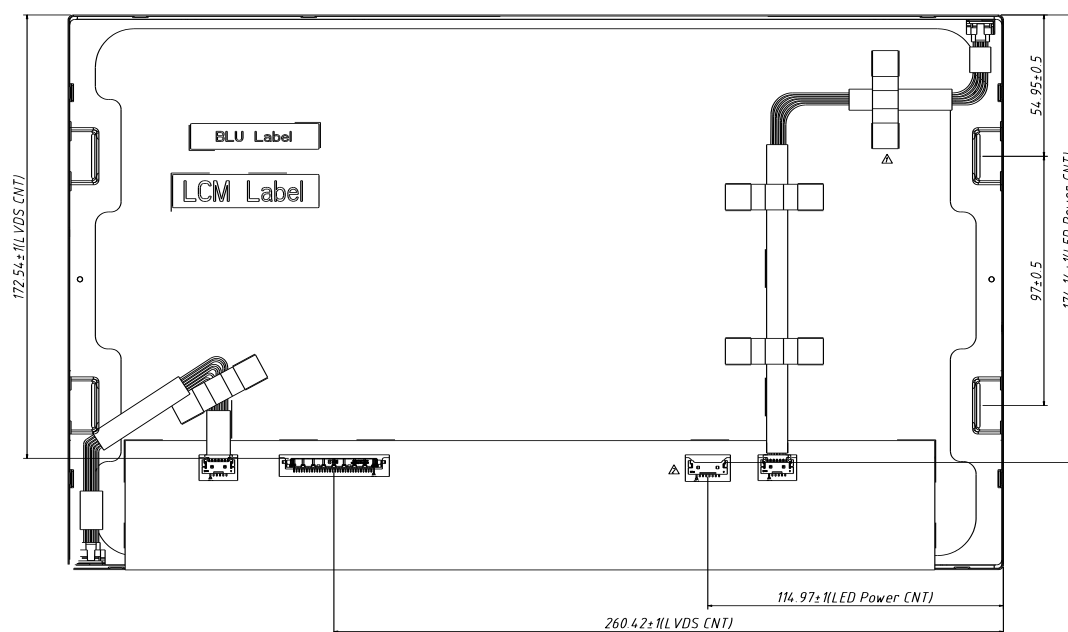


Figure 13 Reference Outline Drawing (Back Side)

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

5.2 Dimension Specifications

Table 4 Module Dimension Specifications

Item	Min.	Typ.	Max.	Unit
Width	363.3	363.80	364.3	mm
Height	215.4	215.90	(216.4	mm
Thickness(PCB Side)	-	-	11.9	mm
Weight	-	-	960	g

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

6.0 Reliability Conditions

Table 5 Reliability Condition

Item		Package	Test Conditions		Note
High Temperature Operating Test		Module	T _a =85°C(Panel surface), 300hrs		(1),(2),(3),(4)
High Temperature Storage Test		Module	T _a =85°C, 300hrs		(1),(2),(3),(4)
Low Temperature Operating Test		Module	T _a =-30°C , 300 hrs		(1),(2),(3),(4)
High Temperature/High Humidity Operating Test		Module	T _a =40°C , 90%RH, 300 hrs		(1),(2),(3),(4)
Thermal Shock Non-operation Test		Module	-20°Cto 60°C,Duration at 30 min , 100cycles		(1),(3),(4)
Shock Non-operating Test		Module	100G,6ms,X Y Z× 2faces× 3times		(1),(3),(5)
Vibration Non-operating Test		Module	half-sine Frequency: 8Hz ~ 33Hz Stroke: 1.3mm Sweep: 2.9G 33.3Hz ~ 400Hz X, Z Cycle: 15 minutes 2 hrs for each direction of X, Z; 4 hours for Y direction		
ESD Test	Operating	Module	Contact	± 8 KV, 150pF(330Ohm)	(1),(2), (6)
			Air	± 15 KV, 150pF(330Ohm)	

Note (1) A sample can only have one test. Outward appearance, image quality and optical data can only be checked at normal conditions according to the IVO document before reliable test. Only check the function of the module after reliability test.

Note (2) The setting of electrical parameters should follow the typical value before reliability test.

Note (3) During the test, it is unacceptable to have condensate water remains. Besides, protect the module from static electricity.

Note (4) The sample must be released for 24 hours under normal conditions before judging.

Furthermore, all the judgment must be made under normal conditions. Normal conditions are defined as follow: Temperature: 25°C , Humidity: $55\pm 10\%\text{RH}$. T_a = Ambient Temperature

Note (5) The module should be fixed firmly in order to avoid twisting and bending.

Note (6) It could be regarded as pass, when the module recovers from function fault caused by ESD after resetting.

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

7.0 Package Specification

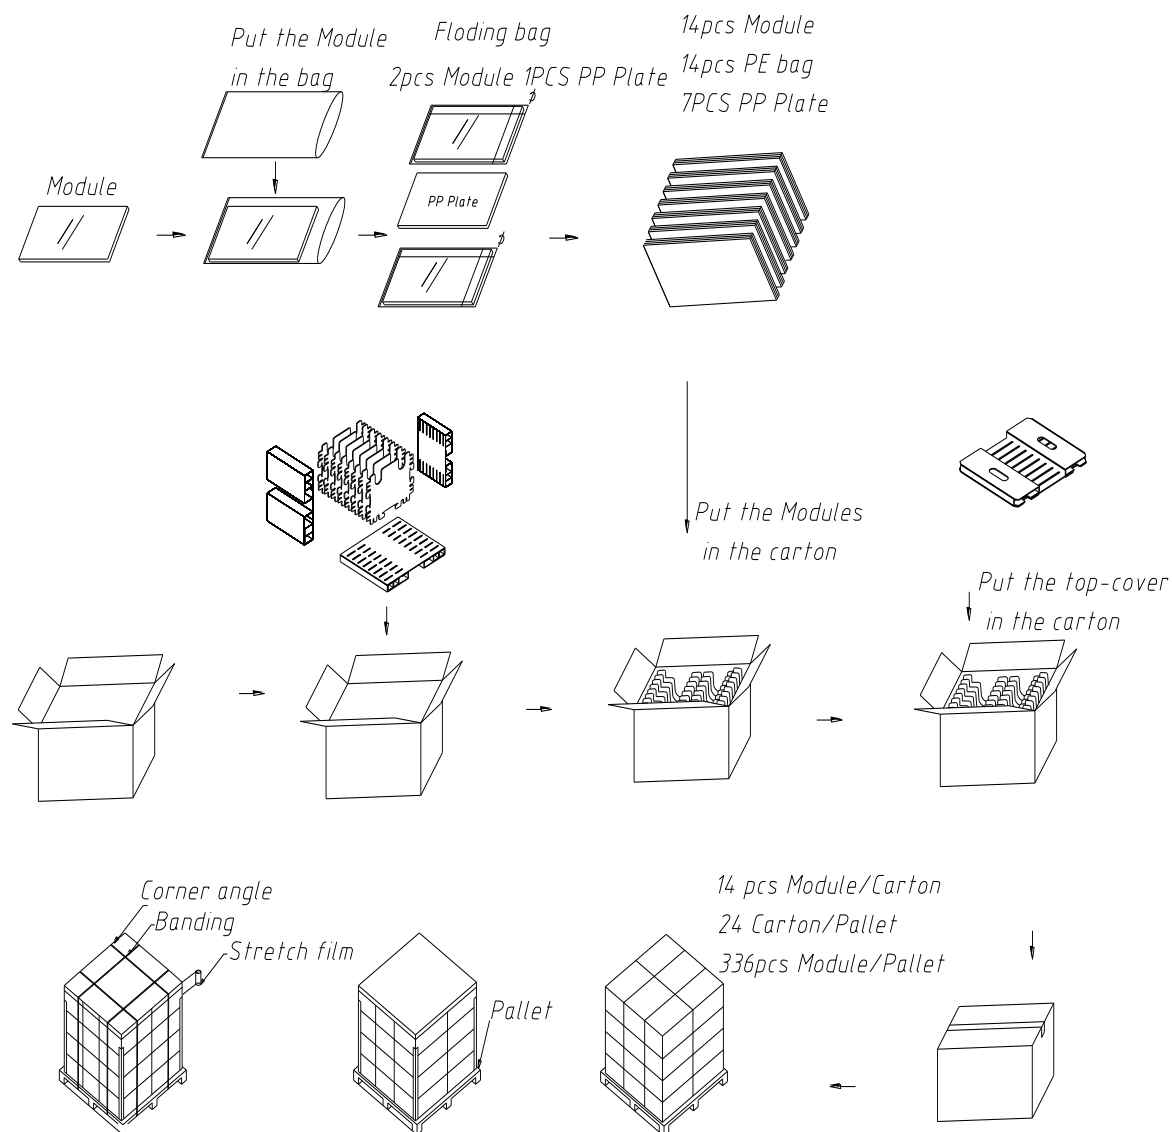


Figure 14 Packing Method

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

8.0 General Precaution

8.1 Using Restriction

This product is not authorized for using in life supporting systems, aircraft navigation control systems, military systems and any other appliance where performance failure could be life-threatening or lead to be catastrophic.

8.2 Operation Precaution

(1) The LCD product should be operated under normal conditions.

Normal conditions are defined as below:

Temperature: 25°C

Humidity: 55±10%

Display pattern: continually changing pattern (Not stationary)

(2) Brightness and response time depend on the temperature. (It needs more time to reach normal brightness in low temperature.)

(3) It is necessary for you to pay attention to condensation when the ambient temperature drops suddenly. Condensate water would damage the polarizer and electrical contacted parts of the module. Besides, smear or spot will remain after condensate water evaporating.

(4) If the absolute maximum rating value was exceeded, it may damage the module.

(5) Do not adjust the variable resistor located on the module.

(6) Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding may be important to minimize the interference.

(7) Image sticking may occur when the module displayed the same pattern for long time.

(8) Do not connect or disconnect the module in the “power on” condition. Power supply should always be turned on/off by the “power on/off sequence”

(9) Ultra-violet ray filter is necessary for outdoor operation.

8.3 Mounting Precaution

(1) All the operators should be electrically grounded and with Ion-blown equipment turning on when mounting or handling. Dressing finger-stalls out of the gloves is important for keeping the panel clean during the incoming inspection and the process of assembly.

(2) It is unacceptable that the material of cover case contains acetic or chloric. Besides, any other material that could generate corrosive gas or cause circuit break by electro-chemical reaction is not desirable.

(3) The case on which a module is mounted should have sufficient strength so that external force is not transmitted to the module directly.

(4) It is obvious that you should adopt radiation structure to satisfy the temperature specification.

(5) It should be attached to the system tightly by using all holes for mounting, when the module is assembled. Be careful not to apply uneven force to the module, especially to the PCB on the back.

(6) A transparent protective film needs to be attached to the surface of the module.

(7) Do not press or scratch the polarizer exposed with anything harder than HB pencil lead. In addition, don't touch the pin exposed with bare hands directly.

MAXEN ELECTRONICS LIMITED

Email: melody.xia@maxen-lcddisplay.com Http://www.maxen-lcddisplay.com

- (8) Clean the polarizer gently with absorbent cotton or soft cloth when it is dirty.
- (9) Wipe off saliva or water droplet as soon as possible. Otherwise, it may cause deformation and fading of color.
- (10) Clean the panel gently with absorbent cotton or soft cloth when it is dirty. Ethanol(C_2H_5OH) is allowed to be used. Ketone (ex. Acetone), Toluene, Ethyl acid, Methyl chloride, etc are not allowed to be used for cleaning the panel, which might react with the polarizer to cause permanent damage.
- (11) Do not disassemble or modify the module. It may damage sensitive parts in the LCD module, and cause scratches or dust remains. IVO does not warrant the module, if you disassemble or modify the module.

8.4 Handling Precaution

- (1) Static electricity will generate between the film and polarizer, when the protection film is peeled off. It should be peeled off slowly and carefully by operators who are electrically grounded and with Ion-blown equipment turning on. Besides, it is recommended to peel off the film from the bonding area.
- (2) The protection film is attached to the polarizer with a small amount of glue. When the module with protection film attached is stored for a long time, a little glue may remain after peeling.
- (3) If the liquid crystal material leaks from the panel, keep it away from the eyes and mouth. In case of contact with hands, legs or clothes, it must be clean with soap thoroughly.

8.5 Storage Precaution

When storing modules as spares for long time, the following precautions must be executed.

- (1) Store them in a dark place. Do not expose to sunlight or fluorescent light. Keep the temperature between $5^{\circ}C$ and $35^{\circ}C$ at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) It is recommended to use it in a short-time period, after it's unpacked. Otherwise, we would not guarantee the quality.

8.6 Others

When disposing LCD module, obey the local environmental regulations.